


VITI PER TRUCIOLARE A TESTA SVASATA CON CALOTTA  
IMPRONTA A CROCE 'POZIDRIV'

DIN 7505 C

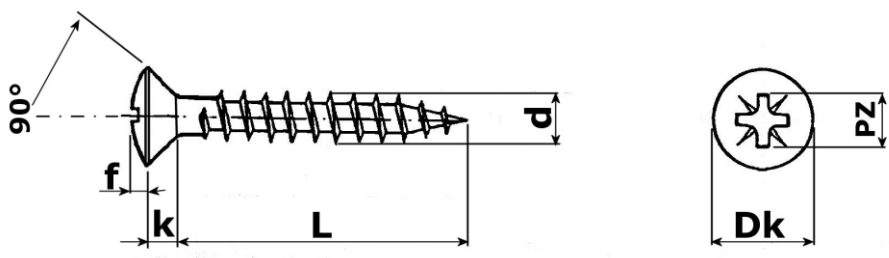

d	2,5	3	3,5	4	4,5	5	6
Dk max	5	6	7	8	9	10	12
k ~	1,41	1,81	2,01	2,35	2,55	2,85	3,35
f ~	0,7	0,65	0,9	1	1,15	1,2	1,55
PZ N°	1	1	2	2	2	2	3