


VITI TESTA ESAGONALE SENZA FLANGIA

UNI 6949 – DIN 7976 – ISO 1479

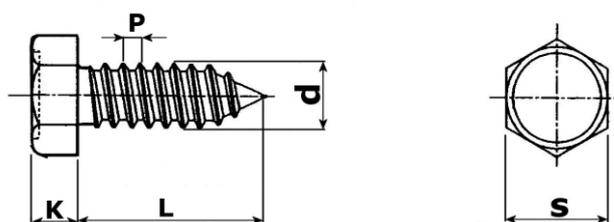

Diametro vite	2,9	3,5	4,2	4,8	5,5	6,3
N.ISO	4	6	8	10	12	14
P (passo)	1,06	1,27	1,41	1,59	1,81	1,81
S	5	5,5	7	8	8	10
k~	1,5	2,3	2,8	3	4	4,8
Resistenza minima a torsione N.m	1,5	2,7	4,4	6,3	10	13,6